

UP-GEL SERIES

UP-GV600-6RE



ISO 9001



ISO 14001



OHSAS 18001



MH 28539 G4M20206-0910-E-16



DEEP CYCLE GEL



GENERAL FEATURES




UP-GV series is hybrid GEL, especially designed for frequent discharge deep cycle application. By using the specially designed, active material, strong grids and thick plate construction, the UP-GV GEL series battery offers reliable performance in higher load situation and could provide competitive cycles performance by patented GEL technology. It is suitable for Electric Vehicle and Golf cart, Floor Machines, Forklifts, Aerial lifts, Robotics, Marine, RV, Mobility and Medical Equipment, Solar Energy System and most outdoor application.

SPECIFICATION

Cells Per Unit	3
Voltage Per Unit	6
Capacity	424 Ah @ 10hr-rate to 1.80 V per cell @ 25°C
Weight	Approx. 57.0 Kg (Tolerance $\pm 3\%$)
Internal Resistance	Approx. 1.1 m Ω
Terminal	F14 (M8) / F22 (M8)
Maximum Discharge Current	4000 A (5 sec)
Cold Cranking Ampere (CCA)	800 A
Maximum Charging Current	120 A
Reference Capacity	C3 309.9 Ah C5 349.5 Ah C10 424.0 Ah C100 600.0 Ah
Standby Use Voltage	6.8 V ~ 6.9 V @ 25°C Temperature Compensation: -3 mV / °C / Cel
Cycle Use Voltage	7.3 V ~ 7.4 V @ 25°C Temperature Compensation: -4 mV / °C / Cell
Operating Temperature Range	Discharge: -20°C ~ 60°C Charge: 0°C ~ 50°C Storage: -20°C ~ 60°C
Normal Operating Temperature Range	25°C $\pm$ 5°C
Self Discharge	UPOWER Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



DIMENSIONS



Length	295 ± 2 mm (11.6 inches)
Width	178 ± 2 mm (7.01 inches)
Height	404 ± 2 mm (15.9 inches)
Total Height	423 ± 2 mm (16.7 inches)
Terminal	Value
M5	6 ~ 7 N*m
M6	8 ~ 10 N*m
M8	10 ~ 12 N*m

CONSTANT CURRENT DISCHARGE CHARACTERISTICS: A (25°C)

F.V / Time	30 Min	1 Hr	2 Hr	3 Hr	4 Hr	5 Hr	8 Hr	10 Hr	20 Hr
1.60 V	424.5	246.8	145.8	112.9	88.8	75.5	50.8	42.2	22.1
1.65 V	407.5	238.4	141.1	109.4	86.4	73.6	50.2	41.7	21.7
1.70 V	389.5	230.6	136.5	106.5	84.0	71.7	49.4	41.1	21.5
1.75 V	372.3	222.2	131.7	103.3	81.9	69.9	48.7	40.5	21.2
1.80 V	355.8	213.7	127.0	100.1	79.5	68.1	47.9	40.0	21.0
1.85 V	306.5	191.7	116.3	92.5	73.9	63.5	45.0	37.7	19.9

CONSTANT POWER DISCHARGE CHARACTERISTICS: WPC (25°C)


F.V / Time	30 Min	1 Hr	2 Hr	3 Hr	4 Hr	5 Hr	8 Hr	10 Hr	20 Hr
1.60 V	770.9	463.9	276.2	215.7	170.4	145.6	99.1	83.0	43.5
1.65 V	747.9	450.5	268.7	209.9	166.4	142.4	98.2	82.1	42.8
1.70 V	722.0	438.6	261.3	205.1	162.5	139.1	96.9	80.9	42.4
1.75 V	697.2	425.1	253.4	199.8	158.9	136.1	95.8	80.0	41.9
1.80 V	673.1	411.2	245.5	194.4	154.9	133.1	94.4	79.0	41.5
1.85 V	585.5	371.1	226.2	180.5	144.6	124.5	88.8	74.5	39.5

Note: The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


The battery must be fully charged before the capacity test. The C10 should reach 95% after the first cycle and 100% after the third cycle.




CHARGE CHARACTERISTIC CURVE FOR CYCLE USE (IIUU)

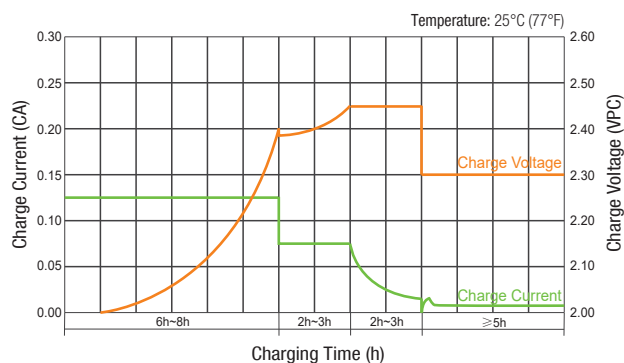


CHARGE CHARACTERISTIC CURVE FOR CYCLE USE (IUI)

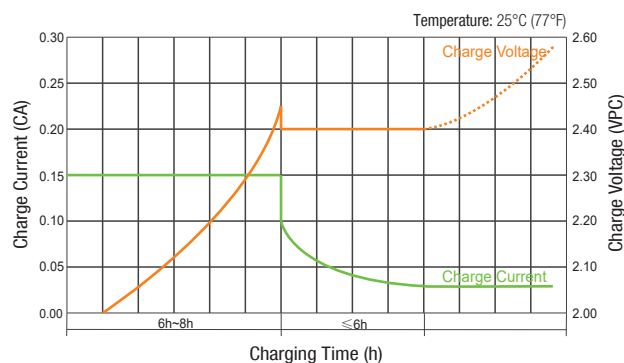


CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

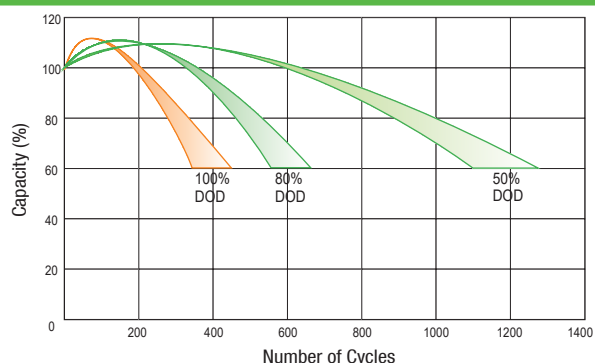


STORAGE CHARACTERISTICS

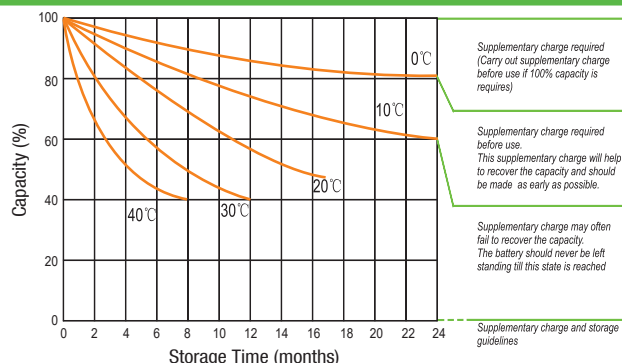


DISCHARGE CHARACTERISTICS CURVE

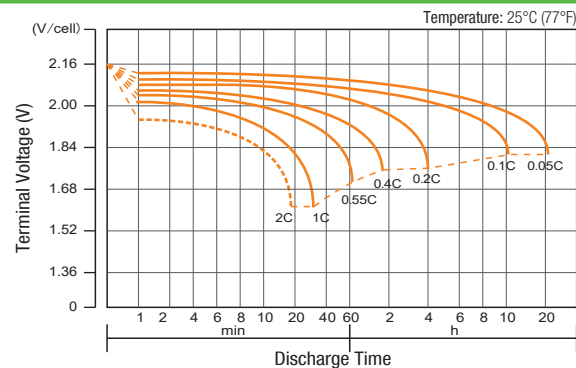


RELATIONSHIP BETWEEN CHARGING VOLTAGE AND TEMPERATURE

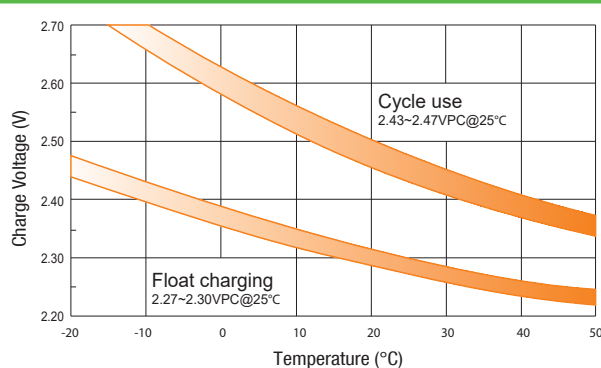

RELATIONSHIP OF OCV AND STATE OF CHARGE (20°C)

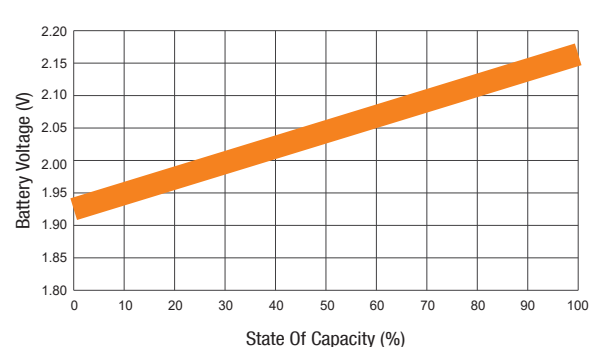

TEMPERATURE EFFECTS ON CAPACITY

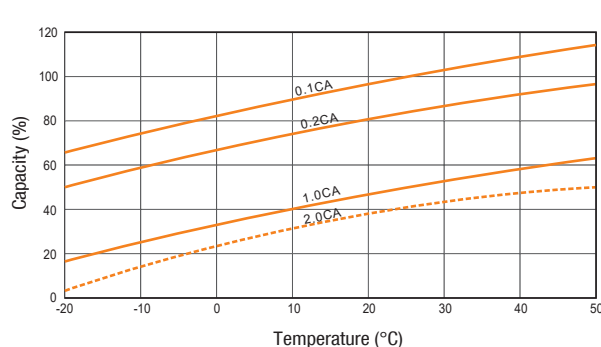

Note: All above information shall be changed without prior notice, UPOWER reserves the right to explain and update the latest information.

